
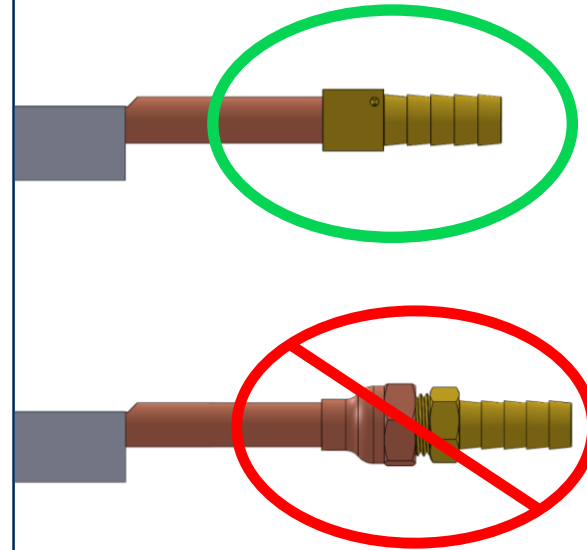


Solder Hose Barb Fitting-Brass

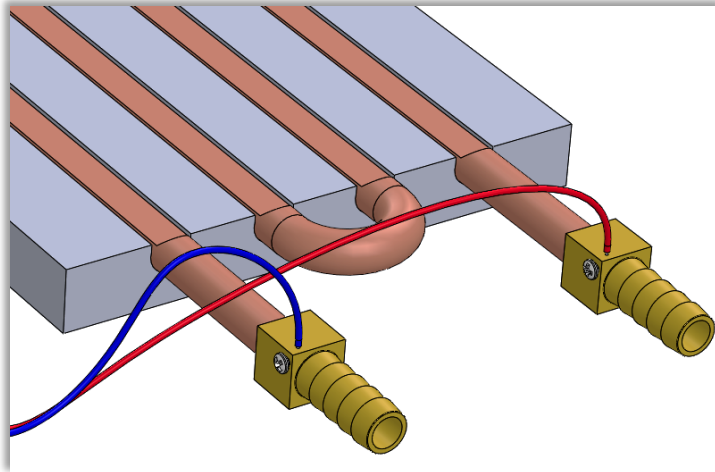

Reduces the need for 2 threaded fittings.

Benefits

- Direct solder connection.
- In/Out length reduction.
- More economical than 2 fittings.
- 250 max PSI @ 72°F rating.
- Thermocouple or thermistor hole allows a direct temperature reading of the inlet and outlet fluids.
- As shown: 3/8 OD tube to accept 3/8 ID soft tube with thermocouple hole and set screw.
- Other sizes available.
- Call us today to speak with someone about our custom fittings.
- D6 Industries (978) 989-0981